

TECHNICAL INFORMATION

No: PRO-01-1/2

Subject: MODIFICATION OF MR-1 FOR NON-STANDARD EQUALIZATION Date: 8-27-85

GENERAL

The following modification is offered in order that the record/playback characteristics of the Nakamichi MR-1 may be altered to closely resemble the many decks with non-standard equalization.

It must be noted that record/playback performance of the altered unit will be diminished.

MODIFICATION

Playback Amp. (Fig. 1)

- Step 1: Insure that R109, R209, R110, and R210 are not shorted.
- Step 2: Change R109 and R209 from 390 ohms to 1K ohm.
- Step 3: Add a 390 pf polypropylene capacitor in parallel with C166 and C266.

Record Amp. (Fig. 2)

- Step 1: Change R195 and R295 from 1K ohm to 680 ohms.

TECHNICAL INFORMATION

No: PRO-01-2/2

Subject: MODIFICATION OF MR-1 FOR NON-STANDARD EQUALIZATION Date: 8-27-85

Figure 1
Playback amp

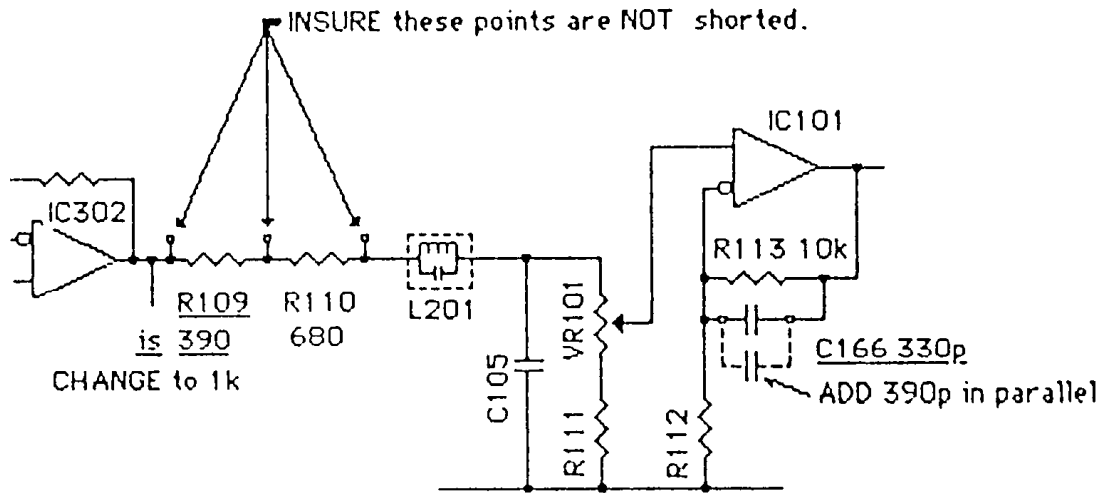


Figure 2
Record amp

